

terneo rk



-55...+125 °

-55...+125 °



/		
1		-55...+125 °
2		16
3		3 000
4		220 ±10 %
5		0,27 ±10 %
6		80 × 90 × 54 мм
7		DS18B20
8		4
9	- -	50 000
10	- -	100 000
11	-	1-30 °
12		14254 IP20




1
1
1
1



5, 6.
1 2, (L) (220 ±10%, 50)
3 4 (N) — 2. ()

2

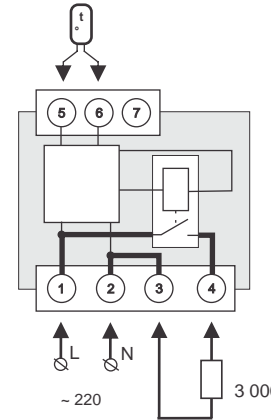

1.



IP55 14254 ()

-5...+45 °

(DIN-)
18

0,5 1,7

2.


()

2

2,5

3

3

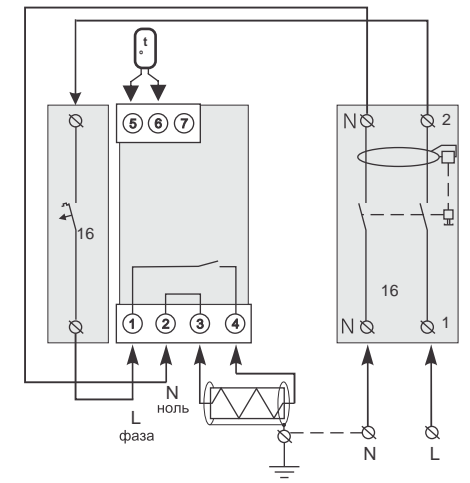

2.


(20)

2/3

() (3).

-2 × 1,5

-2 × 1,0


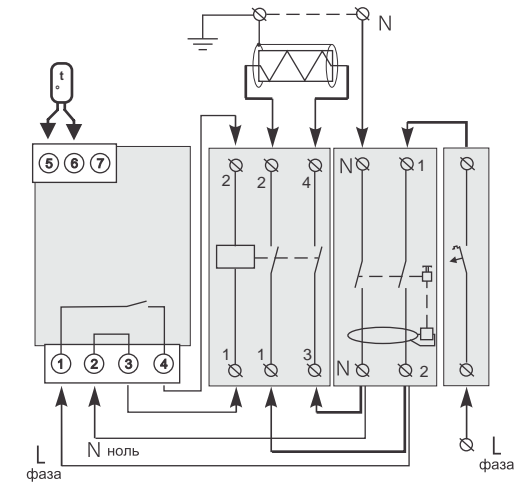


3.

4



30%.

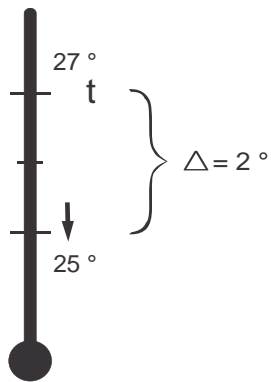

2 3 4.



33.2-3024603335-001-2003.

- 24
- 14
- 14
- 14
- 14
- 14

-25°) (40°

27 25° . « » 10 90%. 50% (50), 15 30- 1 2.



88° , «PrG» () 85° .

220 .