

terneo b30



/		
1		+5...+40 °
2		30
3		6 000
4		220 ±10 %
5		0,29 ±10 %
6		80 × 90 × 54 мм
7		DS18B20 NTC
		10 25 °
8		4
9		50 000
10		100 000
11		1 °
12	14254	IP20




1 .
 1 .
 1 .
 1 .

4, 5 .

6-7 .

1 2, (220 ±10%, 50)
 (L)
 2, (N) — 1 .

3 () .

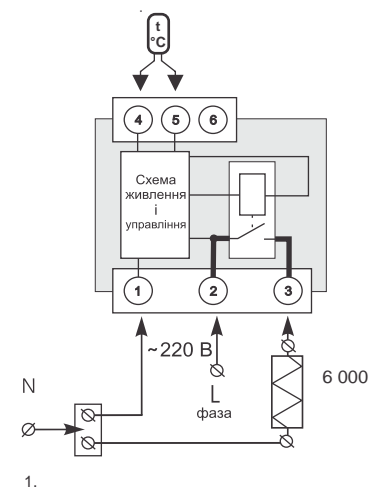

b30

I 55 14254 () .

-5...+45° .

0,5 1,7

() .

30 . 2 .

() .

()


2

b30

35 (DIN-) .
 18

(DIN);

—
 —
 —

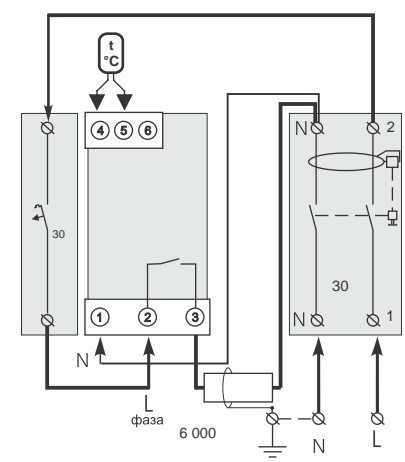

2 .

6,0 2 .

3

3

() .

()


50

5

Ø 16) ,

20)

()

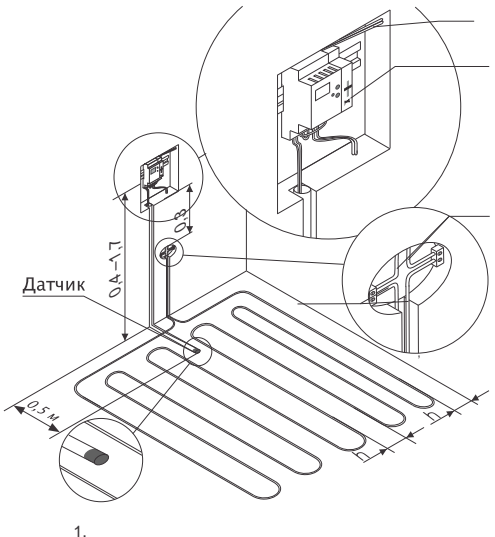

«On» 3 1 2.



«-», «+»

85° 40° -5°)
 « » () 80°
 R1010 × 25° NTC
 10 90% «+» «-»
 30- 50% (50)
 15 30- (-25° , +75°).

(ЭНЕ).



- 1.
- 24
- 2.
- 14
- 3.
- 4.
- 14
- 5.
- 6.

220