

# terneo b



+5...+40 °



/		
1		+5...+40 °
2		16
3		3 000
4		220 ±10 %
5		0,29 ±10 %
6		80 × 90 × 54 мм
7		DS18B20 NTC
		10 кОм × 25 °С
8		4
9		50 000
10		100 000
11		1 °
12	14254	IP20



1 .  
1 .  
1 .  
1 .

5, 6 .


6-7 .

1 2, (220 ±10%, 50 )  
(L) (N) — 2 .

3 4 , ( )

3000 .

2

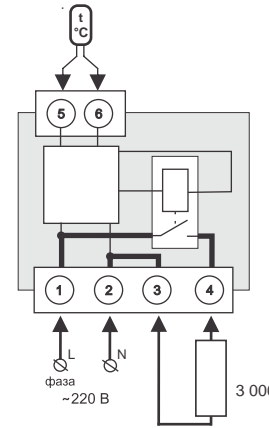

1.



1 55 14254 ( ) .

-5...+45 °

18 .

0,5 1,7

( ) .

16 . 2 .

( ) .

( )


2

60 .

(DIN);

2,5 .

3

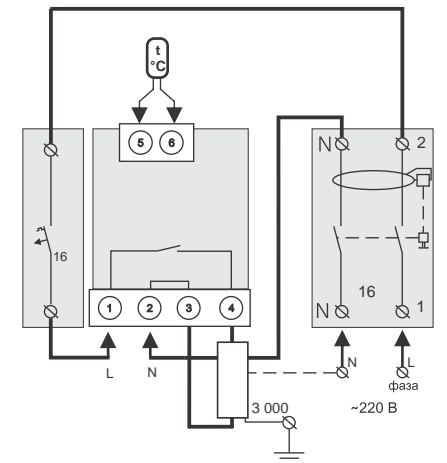

2.

3 . 3

( Ø 16 ) .

50 . 5

( 20 )


2/3

( ) .

( 3) .



2 × 1,0 .

-2 × 1,5 .

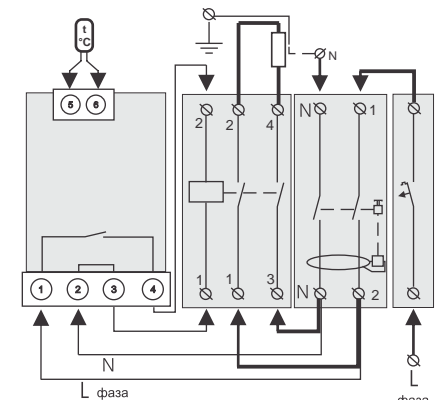

3.

4

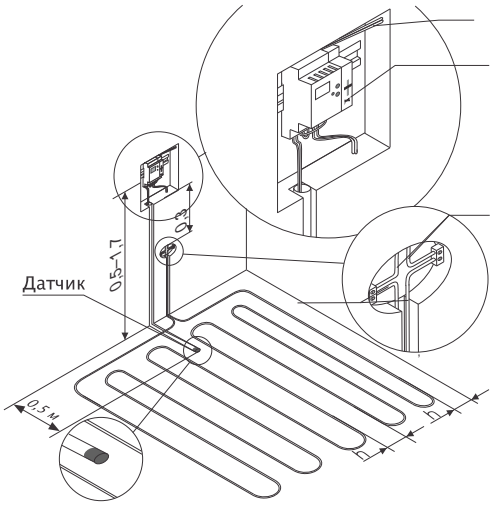

«+» (t) «-»

R10 10 × 25° NTC  
 30- 10 90% «+» «-»  
 50% (50°), (-25° , +75° )

(ЭНЕ).



- 1.
- 24
- ).
- 2.
- 14
- 3.
- 4.
- )
- ( , ),
- (
- )
- )
- 5.
- 6.
- )

220

85° 40° -5° )